

CW-898A

Free Standing


Water Dispenser
Operation Manual



Please read these instructions completely before operating this unit


PREFACE / PARTS

Before using this machine, we advise you to read this manual thoroughly. Please follow the instructions for proper operation to prevent risk or damage.

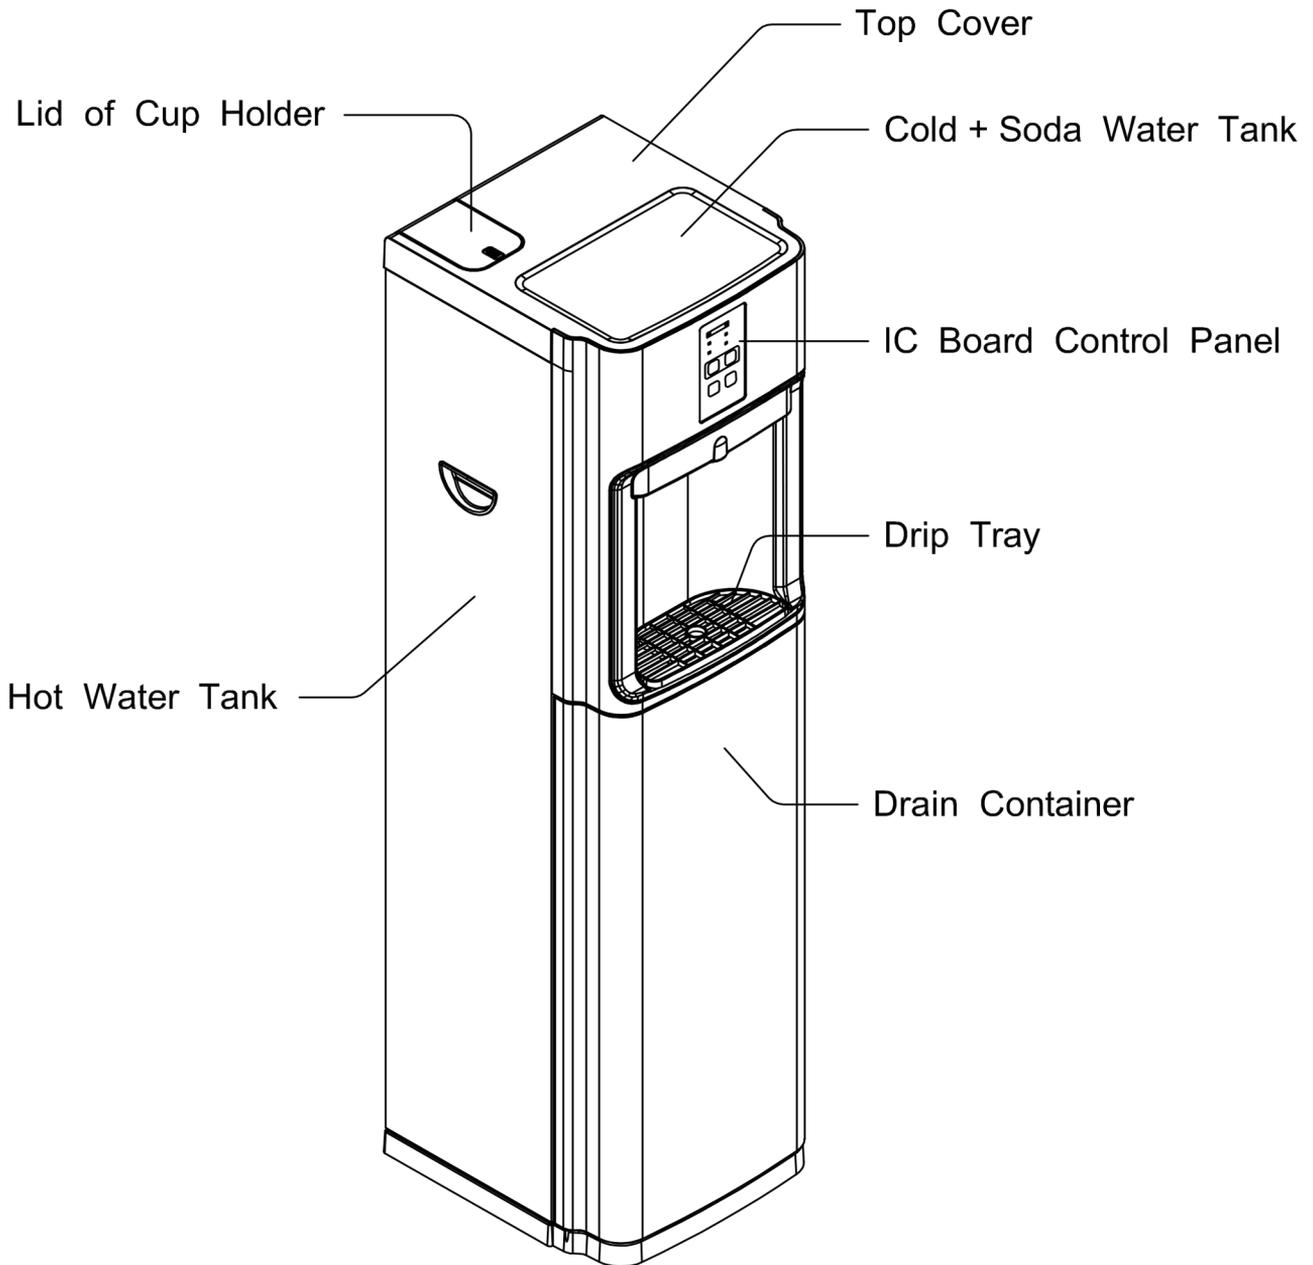

PIPING INSTALLATION


1. Disassemble the original water tap, then put on the tri-way socket and inlet ball valve. See drawing (A).

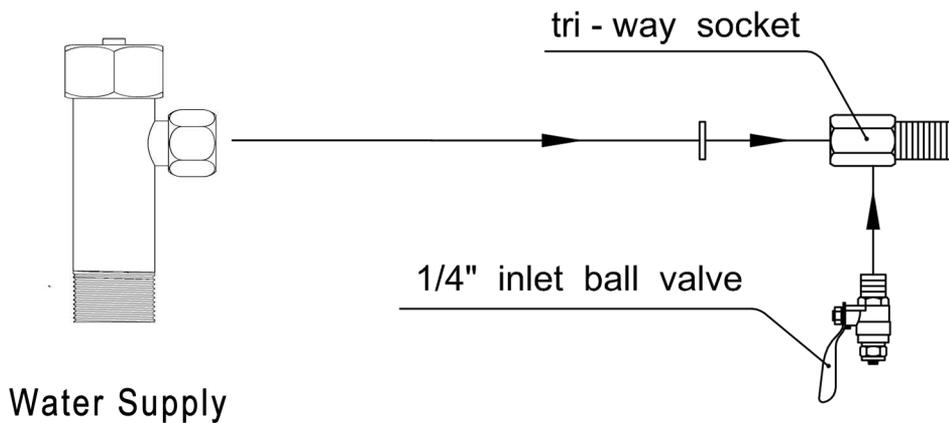

drawing (A)

2. Connect the 1/4" PE water pipe between inlet ball valve and inlet connector. See drawing (B).


Please ensure inlet water is clean, otherwise water filtration system is necessary.

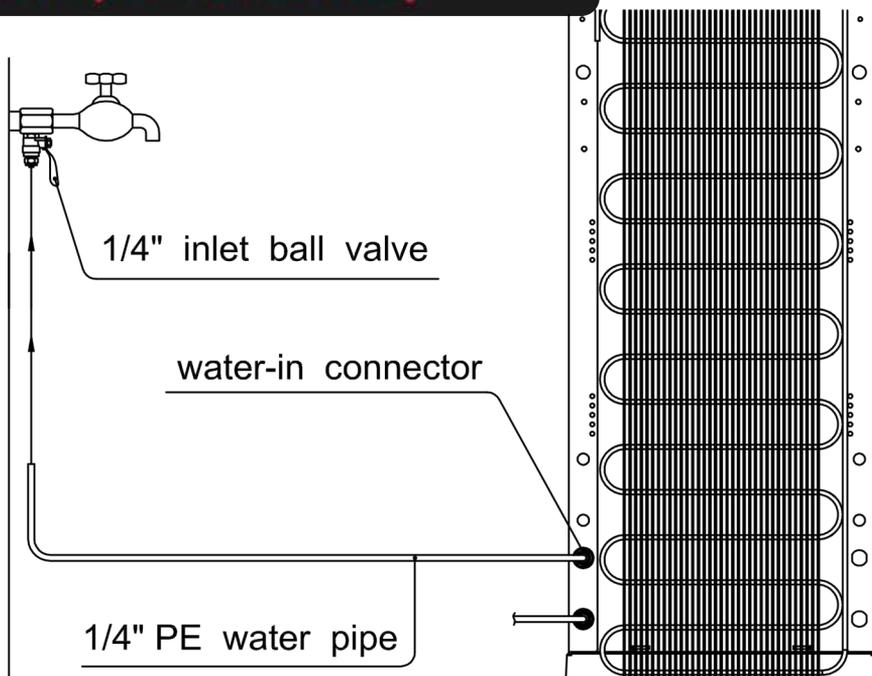


drawing (B)

CUP HOLDER INSTRUCTION


1. Push the clip on top of the cup holder lid as the arrow A shown .

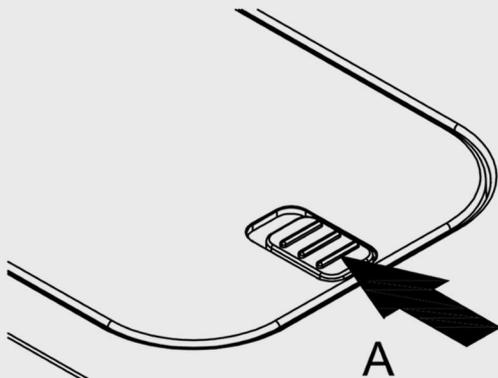


2. Hold the clip as shown in the picture by arrow 1, then lift up the lid as directed by arrow 2 .

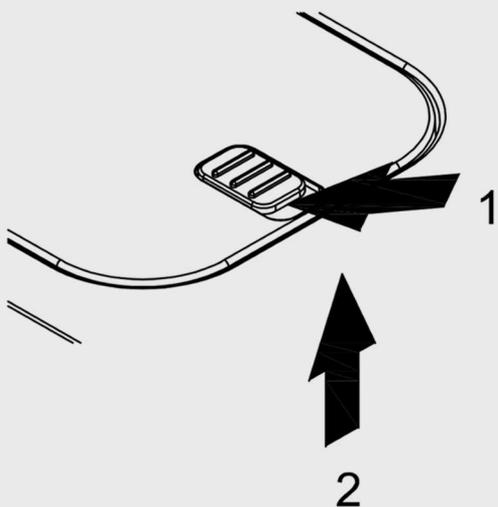

3. Please load the cups into the hidden cup holder with bottoms up. Push cups all the way down as the arrow is showing till no more may fit in .

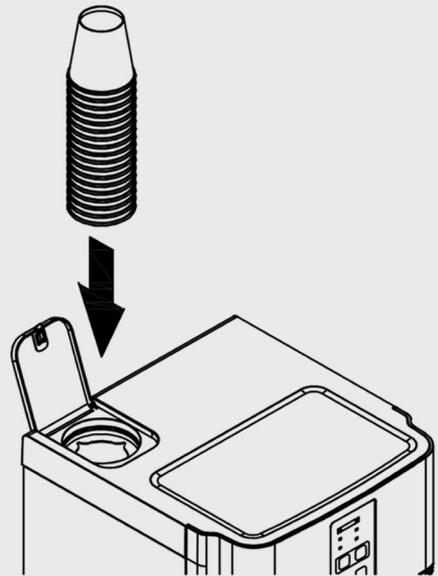



4. Simply pull out the cups gently when needed .

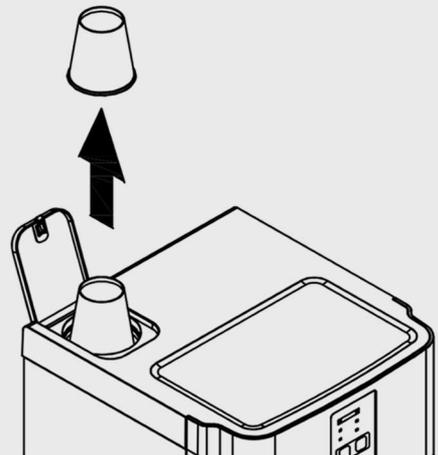


CO₂ CYLINDER INSTALLATION

Please prepare a pressure regulator, adopter and CO₂ bottle. Connect the pressure regulator to the CO₂ bottle with the adopter. After that, apply the PE pipe (CO₂ refill tube) to connect the pressure regulator and soda machine.

Remark : Please adopt the pressure under 4 bar / 4 KG.

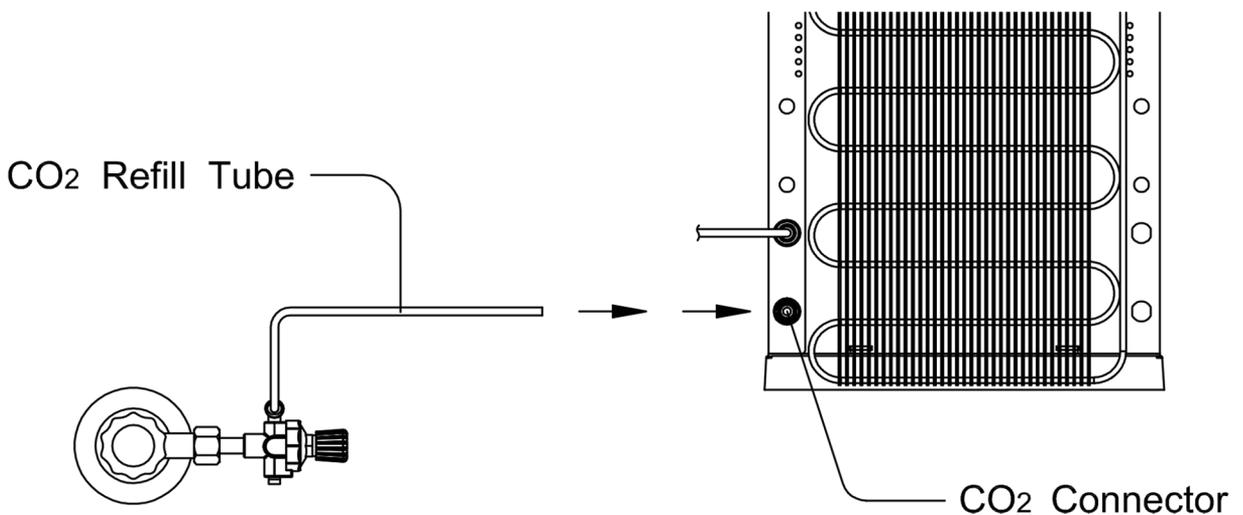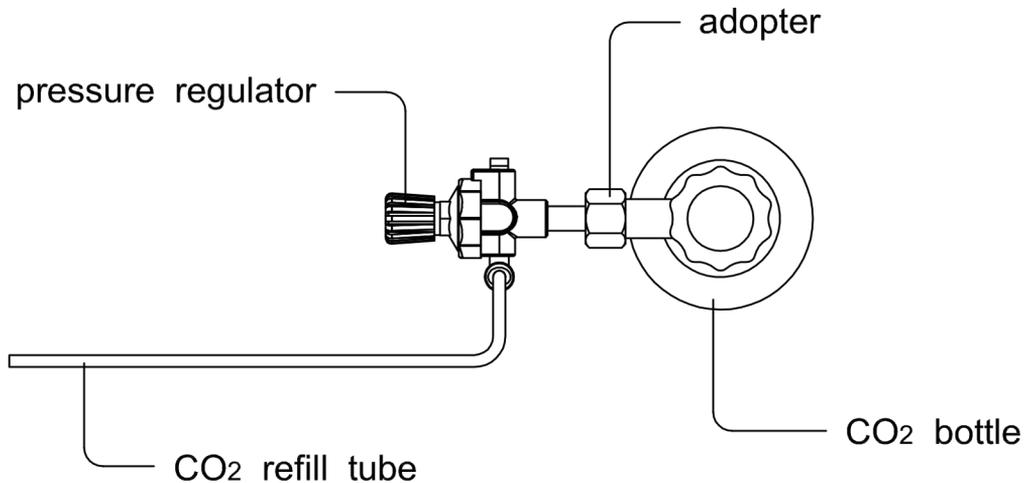

COLD OPERATION METHOD

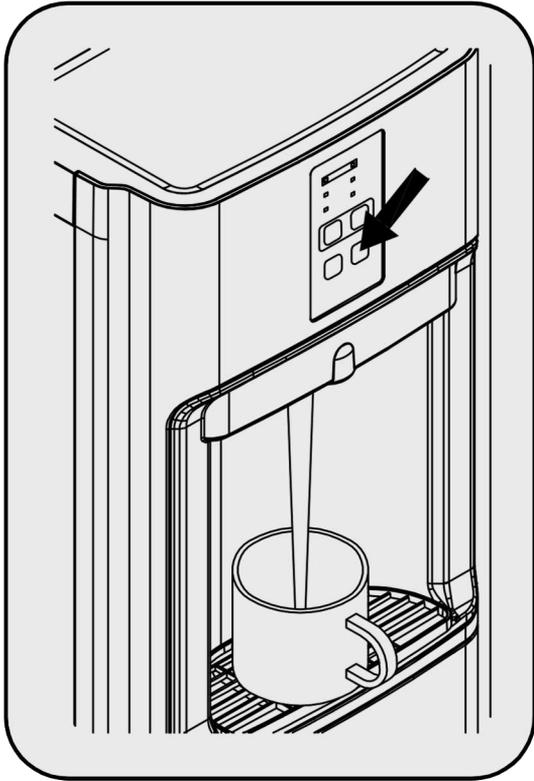


1. Ensure the power switches at rear panel are OFF, then plug in the power cord and connect inlet water.

2. Press ambient or cold water (if there is no ambient water option) button to dispense some water to flush filters. This is important to ensure

3. Touch and hold cold water button to dispensed water until water comes out, it may take 1 - 2 minutes.

4. Turn on cold power switch at back, the machine will start chilling immediately. The chilling may need up to 40 minutes.

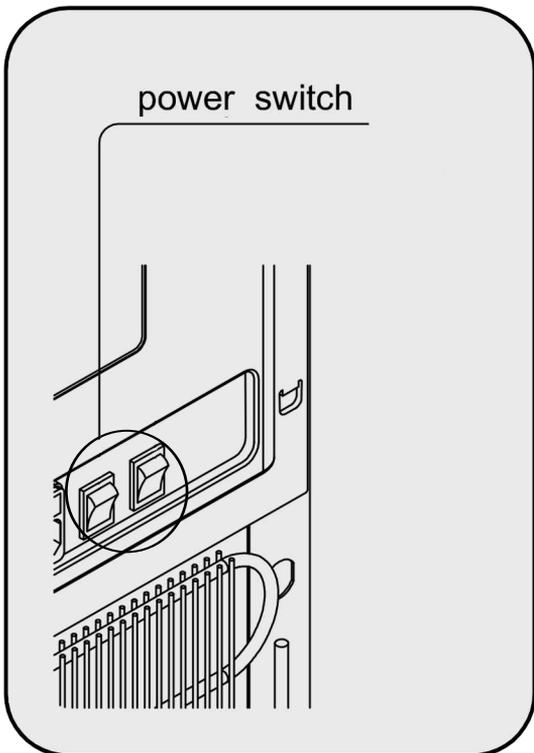

For secure reason, the dispensing is limited within 60 seconds. If you need more water please touch button again.



Cold Water



Hot Water




Sparkling Water



Ambient Water

HOT OPERATION METHOD

1. Ensure the power switches at rear panel are OFF, then plug in the power cord and connect inlet water.
2. Press ambient or cold water (if there is no ambient water option) button to dispense some water to flush filters. This is important to ensure drinking water quality.
3. Press and hold hot water button until seeing water comes out.
Note: This is very important to prevent hot tank dry-heat.
Based on safety reasons, each time pressing unlock button, hot water button must be pressed for 3 seconds to dispense hot water. After the first dispense, hot water may be dispensed right away during the same unlocking period.
4. Turn on hot power switch at back, the machine will start heating immediately. The reheating will be started automatically when hot water temperature is too low.
For secure reason, the dispensing is limited within 60 seconds. If you need more water please touch button again.
5. The energy saving function suspends hot power when the surroundings are dark. Once the light is on, the hot power will be resumed.

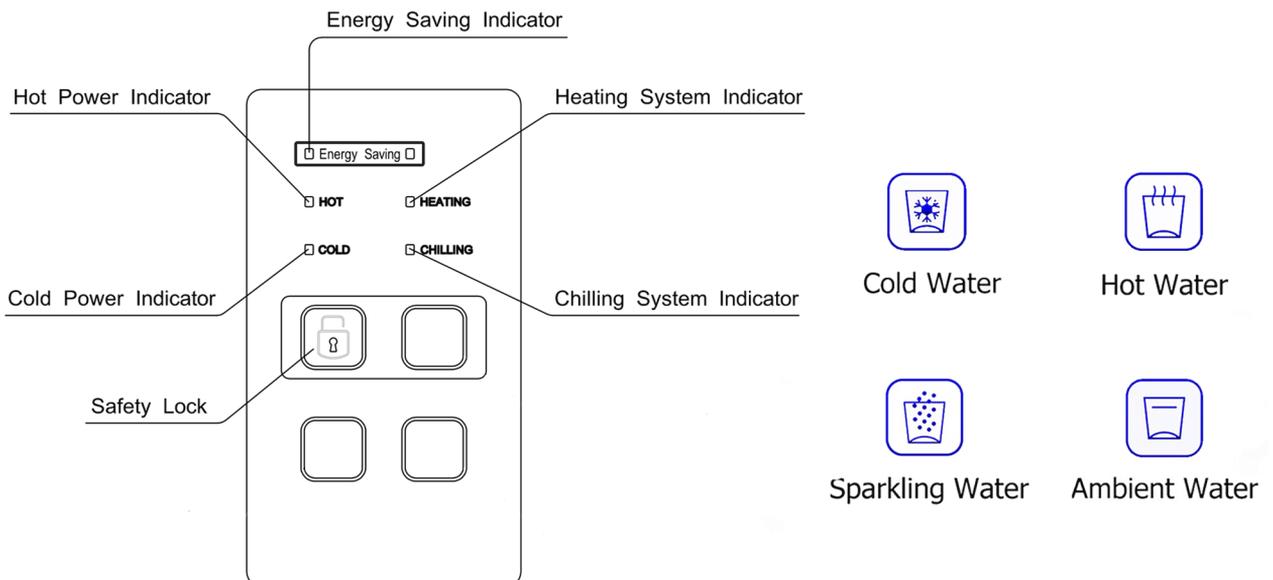

SODA OPERATION METHOD

1. Press ambient or cold water (if there is no ambient water option) button to dispense some water to flush filters. This is important to ensure drinking water quality.
2. Turn on the soda power switch at back, then press any button to allow mains water filling into soda tank.
3. Please push the soda water button to drain out the primary soda water in the tank. The newly produced soda water is now ready to drink.

For secure reason, the dispensing is limited within 60 seconds. If you need more water please touch button again.



Cold Water





Hot Water





Sparkling Water



Ambient Water

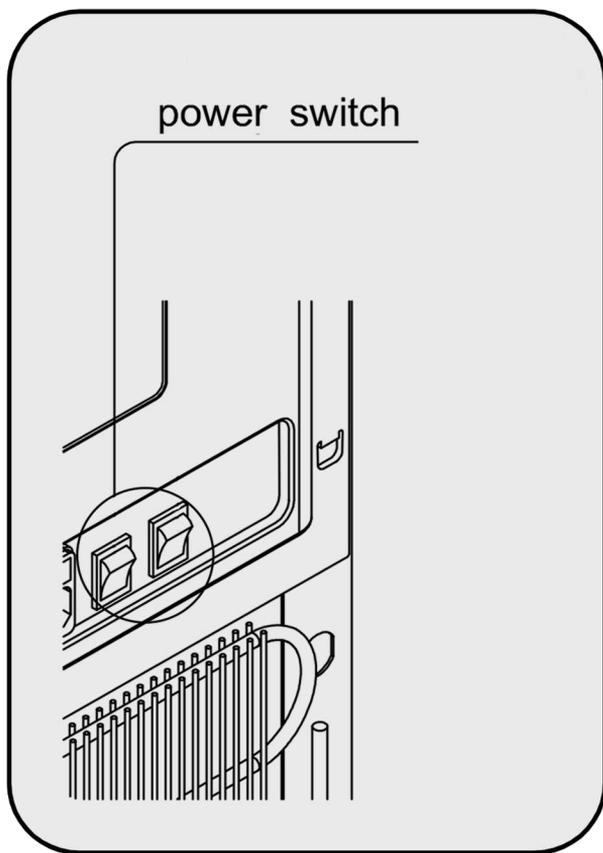
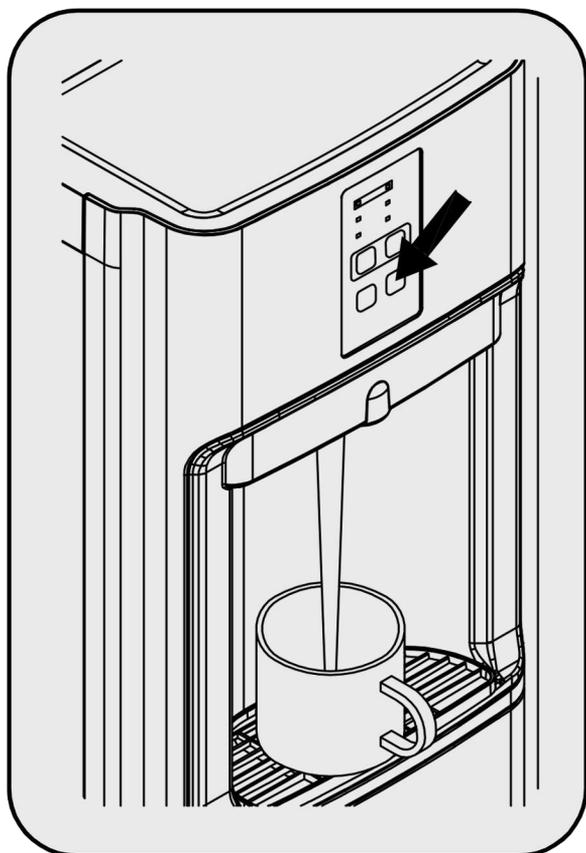


SAFETY REMINDER

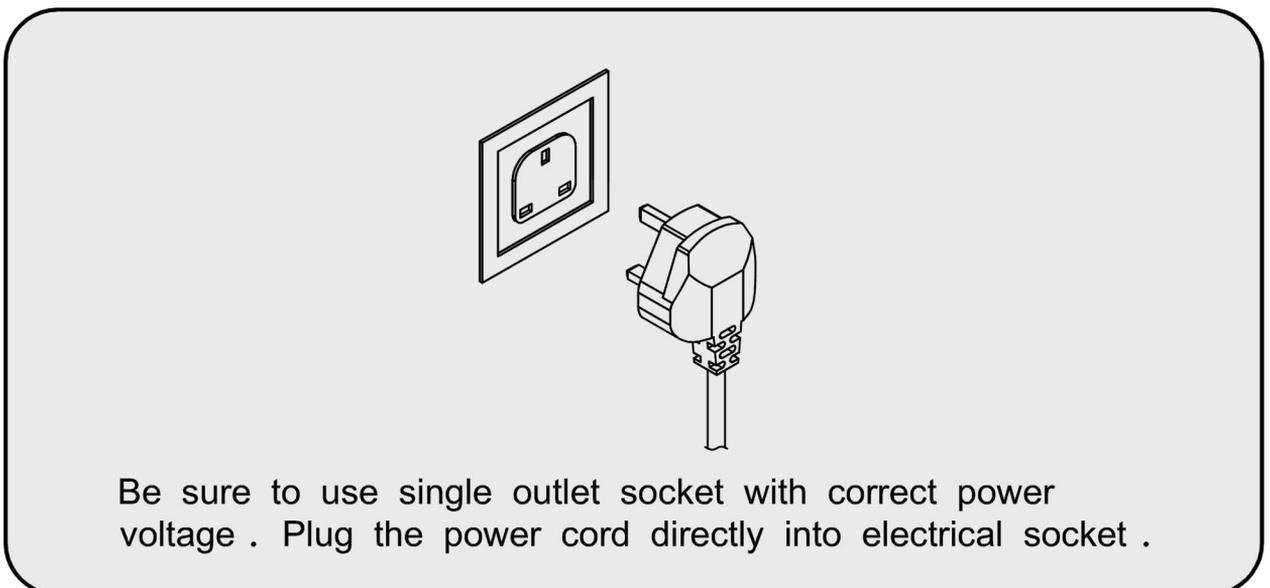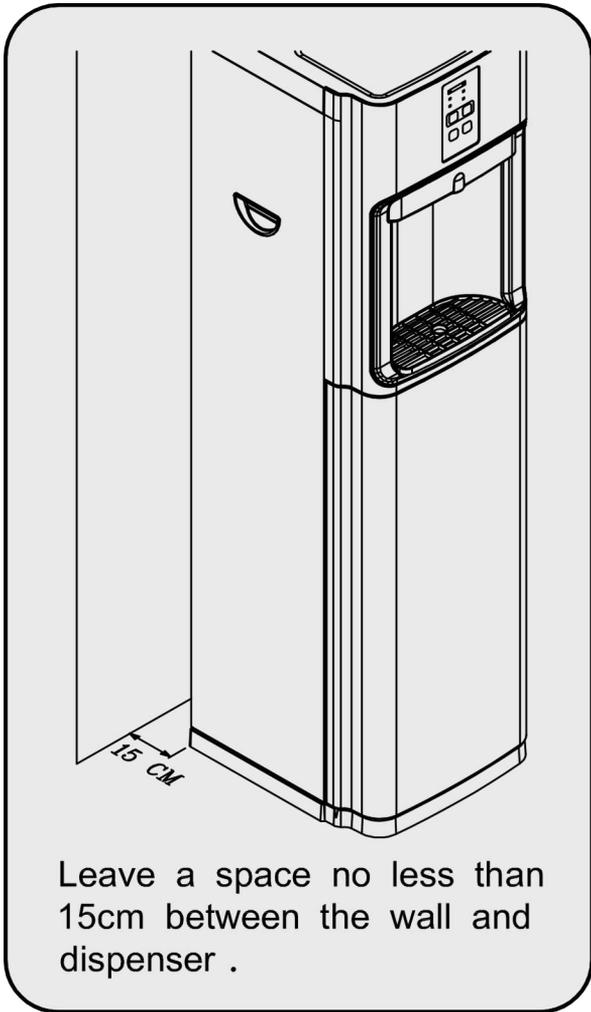

CONTAINER INSTRUCTION

1. The drain container comes with alarm system . Beep sounds to alert the user when the drain container is full of water .
Remove the drain container from the machine as per picture 2 shown .
2. After the drain container is emptied , please place the drain container to the machine .

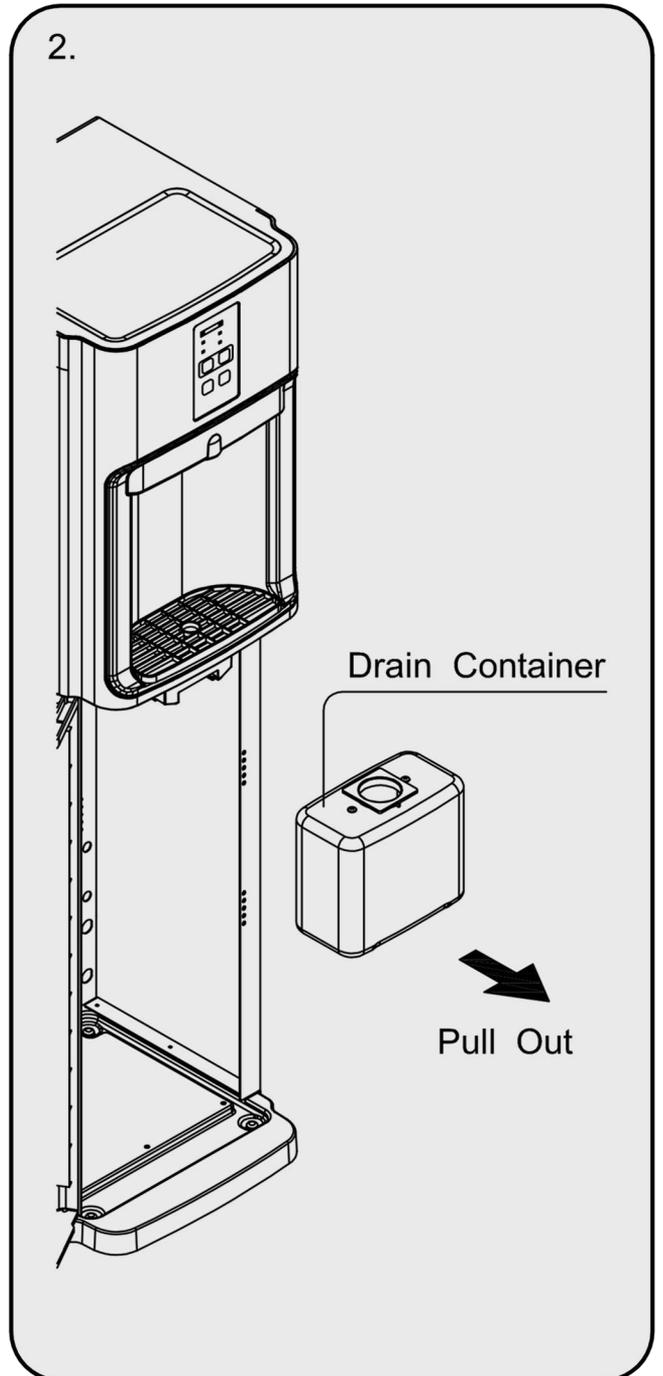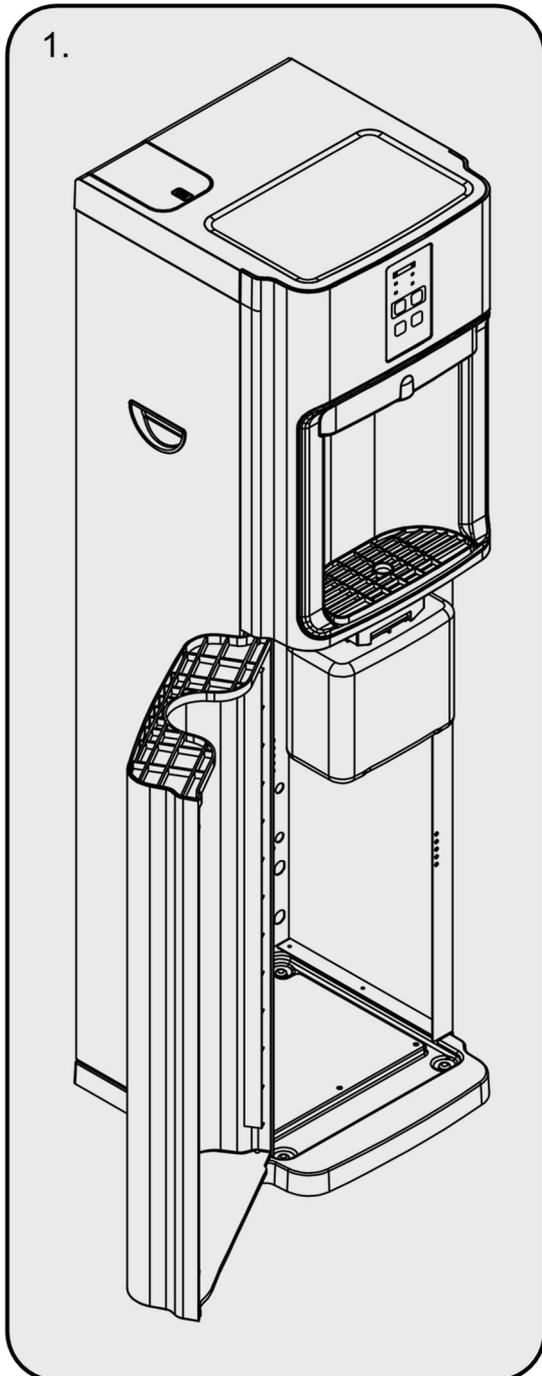

SAFETY WARNING

The appliance is not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction .

This appliance can be used by children aged from 8 years and above if they have been given supervision or instruction concerning use of the appliance in a safe way and if they understand the hazards involved . Cleaning and user maintenance shall not be made by children unless they are older than 8 and supervised. Keep the appliance and its cord out of reach of children aged less than 8 years .

Never allow children near the water dispenser .

Never spillage on the connector .

Switch off the appliance and disconnect from supply before changing accessories or approaching parts that move in use .

The appliances connected to the water mains by detachable hose-sets should be the new hose-sets, that supplied with the appliance are to be used and that old hose-sets should not be reused .


Disconnect the appliance from its power source during service and when replacing parts .

Children shall not play with the appliance .

The edge of metal side panel is sharp , please be careful with it when front lower cover is opened . For replacement , repair , and waste water emptied , users MUST wear gloves to prevent injury .



Gas R600 is flammable, please keep the unit away from fire. When the unit is damaged, please contact your distributor or qualified technician for unit repair.

SAFETY WARNING



1. Please make sure the machine is completely disconnected from electricity before cleaning.

2. Remove the caps on top of the hot water and cold water drains. The remaining water in the tanks will drain out. Cleaning may start when both tanks are emptied. Please put the caps back when cleaning is done.

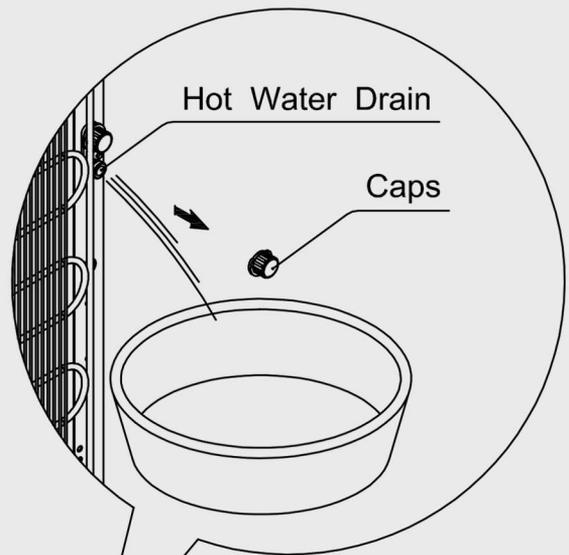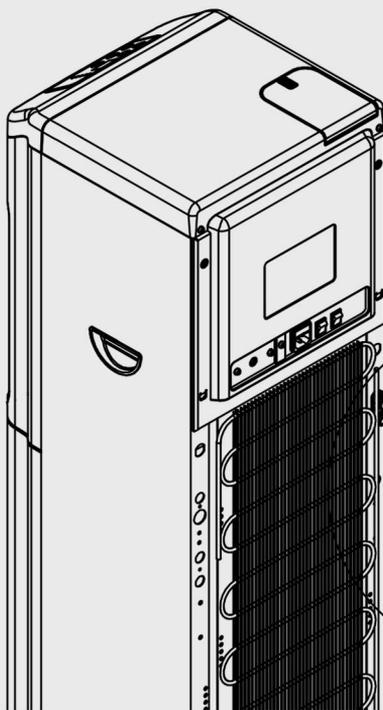

Caution: For your safety, please contact your distributor or qualified technician for repair when the water dispenser is damaged.

PROBLEM SHOOT

| Defection Status | Possible Defection Reason | Solution |
|-----------------------|---|---|
| Hot water is not hot | 1. The hot power switch is off. | Turn the hot power switch on. |
| | 2. Hot temperature protection is enabled due to dry-heat. | Call for service to reset the protection button on the hot tank. |
| | 3. Problem with PCB or thermostat. | Please contact service people. |
| No hot water | 1. No water from mains water supply. | Check inlet water supply. |
| | 2. Inlet water pressure is too low. | Check inlet water pressure from pre-filtration system or water supply. |
| | 3. Water is not being filling into hot tank. | Please press hot water button to fill water into hot tank until water comes out. |
| Cold water is no cold | 1. The cold power switch at back is off | Turn the cold power switch on. |
| | 2. Chilling time is not enough. | Please wait 40 minutes for water chilling. |
| | 3. Refrigerant leaks. | Contact service people. |
| No cold water | 1. No water from mains water supply. | Check inlet water supply. |
| | 2. Cold water is being filling into cold tank. | Contact the service people. |
| | 3. Inlet water pressure is too low. | Check inlet water pressure from pre-filtration system or water supply. |
| | 4. Water in cold water tank got frozen. | Unplug the power cord then wait for 4 – 8 hours. Internal pipe may be broken please contact service people as well. |
| No sparkling water | 1. CO ₂ runs out. | Replace a new CO ₂ Cylinder. |
| | 2. The soda power switch at back is off. | Turn the soda power switch on. |
| | 3. Water is unable to be filled to sparkling water tank. | Contact the service people. |

PROBLEM SHOOT

| Defection Status | Possible Defection Reason | Solution |
|--|--|--|
| Hot water is dripping from dispensing nozzle. | 1. Inlet water pressure is too low. | Check inlet water pressure from pre-filtration system or water supply. |
| | 2. The solenoid valve got malfunction. | Contact service people. |
| Sparkling water is dripping from dispensing nozzle. | 1. The remaining sparkling water in pipe is flowing due to CO ₂ | Wait for a few seconds, it will be stopped. |
| | 2. The solenoid valve got malfunction. | Contact service people. |
| UV indicator light is blinking and hearing beeps when dispensing water. | 1. UV lamp is failure or no UV lamp is connected | Replace a UV lamp or check if the UV wire is disconnected. |
| | 2. UV board is failure. | Contact service people. |
| All dispensing buttons are blinking and hearing beeps when press button. | 1. There is leakage detected inside of water dispenser. | Unplug the power cord, then dry water on the internal base or ask for service. |
| | 2. The waste water container is full. | Please drain all water from waste water container. |
| Bubble of sparkling water is insufficient. | 1. The CO ₂ and water doesn't mixed properly. | Please wait more time. |
| | 2. CO ₂ almost runs out. | Replace CO ₂ cylinder |
| | 3. CO ₂ output pressure is too low. | Please adjust output pressure to 4 bar as suggestion. |